

252248 Cylindrical He3 Neutron Detector

GENERAL SPECIFICATIONS


Gas pressure (torr)	15200	VARIABLE
Cathode material	Stainless Steel	
Maximum length (inch/mm)	26.61/675.9	
Effective length (inch/mm)	23.62/600.0	
Maximum diameter (inch/mm)	1.0/25.4	
Effective diameter (inch/mm)	0.96/24.38	
Connector	SHV	
Effective volume (cm ³)	142.26	
Operating temperature range °C	-50 to +100	

ELECTRICAL SPECIFICATIONS

Recommended operating voltage (volts)	2250	VARIABLE
Operating voltage range (volts)	2150-2400	
Maximum plateau slope (% / 100 volts)	1	
Maximum resolution (% fwhm)	7	
Tube capacitance (pf)	8	
Weight (grams)	375	

THERMAL NEUTRON SENSITIVITY

Sensitivity (cps / nv)	665
------------------------	-----

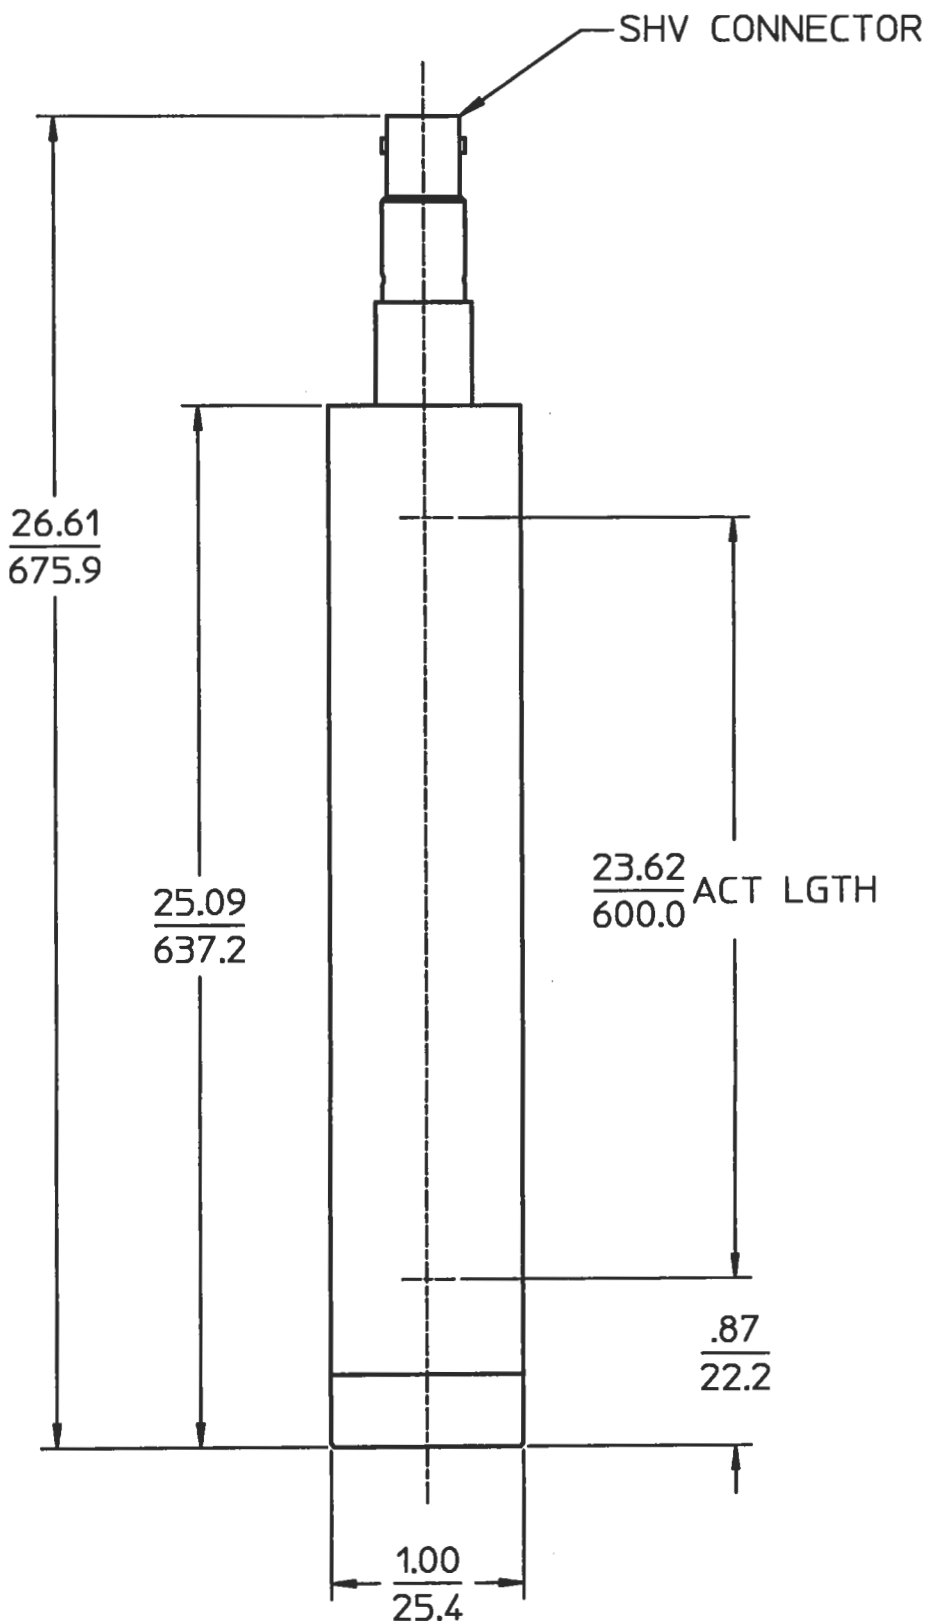

INFORMATION AND DESIGN DISCLOSED HEREIN IS THE PROPERTY OF LND INC. AND ALL PATENT, PROPRIETARY DESIGN, MANUFACTURING, PROCESSING, REPRODUCTION, AND SALES RIGHTS THEREON ARE RESERVED EXCEPT TO THE EXTENT THAT RIGHTS ARE EXPRESSLY GRANTED BY CONTRACTUAL AGREEMENT. DUPLICATION OR DISCLOSURE TO UNAUTHORIZED PARTIES IS FORBIDDEN WITHOUT EXPRESS WRITTEN PERMISSION. COMPLIANCE WITH CONTRACTUAL AGREEMENTS DOES NOT IMPLY AN INTENT BY LND TO MAKE THIS DOCUMENT AVAILABLE TO OTHERS OR TO THE GENERAL PUBLIC NOR TO ABANDON ANY OF SAID PROPRIETARY RIGHTS.


DRAWN	LND, INC. OCEANSIDE, NY 11572 DRAWING NO. 252248
CHECKED	

LND, INC.

Cust P.O.# 4500099484
 Tube Type 252266
 Serial Number 387534
 Oper Volts 916
 Volt Range 1320 - 1570
 FWHM 4.68

LND Job# 10818-00
 Source Pu-Be
 Plateau Slope(%/100V) <3
 Pulse Height(Volts) 1mV
 Charge/Pulse 1.0E-13
 Date 12/21/10

E-Mail: info@lndinc.com Web Site: <http://www.lndinc.com>
 3230 Lawson Blvd., Oceanside NY 11572 Phone:(516) 678-6141 Fax:(516) 678-6704

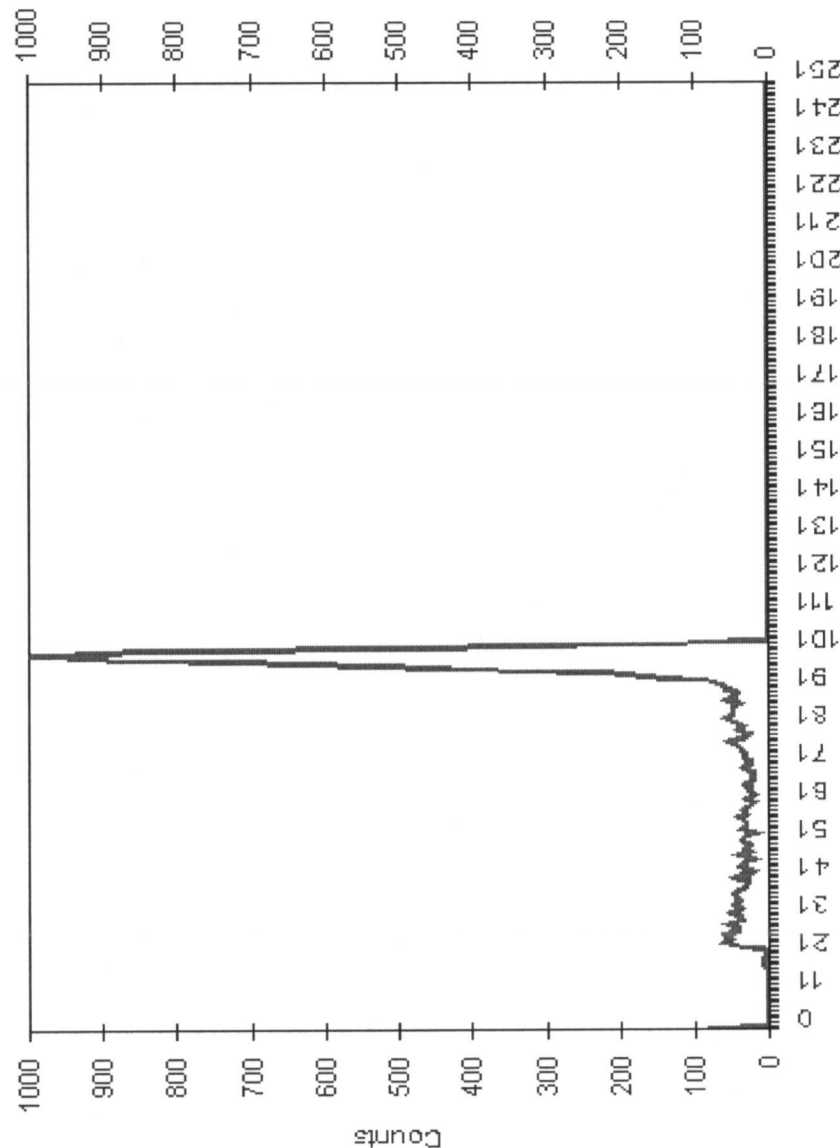

Channels

Entrance Window

Exit Window

Gas Filling He3, Co2
 Gas Press(Torr) 7600
 Connector Type SHV

Window Material N/A
 Areal Density(mg/cm²) N/A
 Thickness(inches/mm) N/A

Window Material N/A
 Areal Density(mg/cm²) N/A
 Thickness(inches/mm) N/A

The mesytec MPR-HV-Series provides a set of state of the art multichannel preamplifier modules, capable of supplying bias voltages of up to $\pm 4000V$. It is specially well suited for amplification of signals from He3 detector tubes which are used for thermal neutron detection. The MPR16-HV series can easily be combined with the mesytec STM-16 or MSCF-16shaping-/timing filter/ discriminator module.

Features:

- 16 channel compact module
- Sensitivity switch, factor 5
- ESD input protection
- Unipolar or differential Head-er output
- Pulser input
- Bias voltage up to $\pm 4000V$
- Input and Bias connectors: SHV



Technical Data

Charge rang

The MPR series provides a switch to amplify the output signal by a factor of 5. This helps to provide large output signals even at low charge depositions and thus provides good noise immunity.

Input stage

- Input connector(s): 16 x SHV connector
- Positive and negative charge can be amplified equally.

Output stage:

- Unipolar or differential header output
- Output amplitude for unipolar header: $\pm 4V$ (terminated)
- Output amplitude for differential header output: $\pm 3V$ terminated.
- Pin assignment of output connector:
pin 1,2 channel 1, pin 3,4 channel 2.....
pin 33, 34 output ground

Rise and decay time:

Decay time: 25 μ s.

Risetime(10% to 90%) is 20ns for 0pF input capacity.

Input protection

As default the MPR16-HV provides strong input protection which even allows to survive a sparc at 2000V. Risetime and noise are increased by this unit, but will not have a negative effect when reading out 3He tubes. For noise sensitive, timing critical or detectors with high capacitance, the input protection can be reduced or removed at production.

Noise

shaping time	MPR16-HV-2PC
σ / FWHM [us]	noise [electrons] FWHM
1 / 2.5	(1000e ⁻ + 10e ⁻ /pF)

Some noise contribution will come from decoupling capacitors. To minimise this effect, apply bias voltage some hours before measuring.

Pulser input

The pulser is internally distributed to individual charge termination capacities. Tolerances $\pm 10\%$.

MPR16-HV-2pC
0.7pF (0.7 pC/V)

Detector bias input

- SHV connector
- Maximum voltage $\pm 4000 V$

Power connector:

SubD9 connector:

- 1, 2 = gnd
- 3 = +6V (+150mA)
- 4 = +12V (+200mA)
- 5 = -6V (-350mA)
- 9 = -12V (-150mA)

Model NHQ202M to NHQ206L

Dual High Voltage Power Supplies

Features

- Dual HV supplies in single NIM packages
- Regulated 0 to ± 2 kV, 3kV, 4kV, 5kV and 6 kV DC, output current - see table
- programmable HV-ramp 2 .. 255 V/S and 500 V/S ramp hardware settable, up and down
- LCD Display 4 digits with sign for voltage and current.
- Resolution of voltage indication: 1V
- Resolution of current indication: 1uA
- Frontpanel LED indicators for polarity
- Low noise and ripple for high resolution detectors: ≤ 2 mVpp typical, 5mVpp max.
- Settable voltage and current limiting
- Short circuit and overload protected
- Programmable HV parameter setting and polling of actual values via RS232C interface
- Continuous setting of HV over full range with 10 turn Helipot
- Easy access to manual polarity switch
- External input for HV shutdown

Description

The Models NHQ 202M-206L HV supplies are a two channel high voltage version in a NIM chassis. Modern patented circuit principles in connection with the latest SMT manufacturing technologies permit the design and construction of very compact high voltage supplies with excellent specifications.

All NHQ models are 1 slot wide, and offer either manual control or operation via RS232 Interface. The use of this interface supports more then the manual control functionality.


The high voltage supplies provide high precision output voltages together with very low ripple and noise, even under full load. Separate 10%-step hardware switches enable to set voltage and current limits. An INHIBIT input provides instant shutdown to protect sensitive detector devices.

Additionally, the maximal output current per channel is programmable via the interface. The high voltage outputs protected against overload and short circuit. The output polarity can be selected by manual rotary switches accessible from the side of the module without having to take the side-cover off.

The output polarity can also be set by software through the RS232C interface. The chosen polarity is displayed by a

LED on the front panel and a sign on the LCD display. It is not allowed to change the polarity under power! An undefined switch setting (not at one of the end positions) will cause no output voltage.

For effective protection of connected devices the maximum output voltage and current can be selected in 10%-steps with the rotary switches $V_{\max}$ and $I_{\max}$ (switch dialed to 10 corresponds to 100%). An output voltage or current exceeding the set limit is signalled by the red front panel error LED.

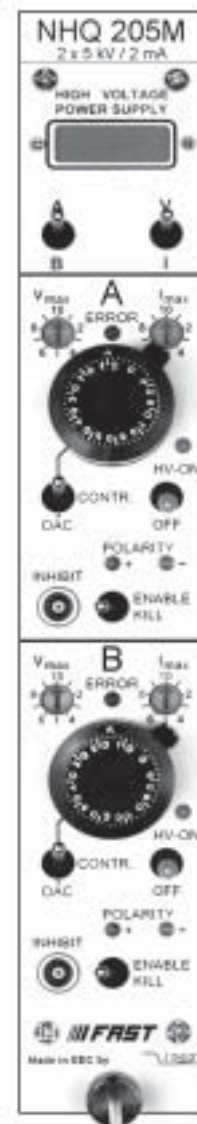

The range of NHQ 200 series HV supplies

Model	Output Voltage	Outp. Current per channel	Ripple typical	LCD res. current	LCD res. voltage	Power req. +/- 24V	Power req. +/- 6V	Type	Order Number
NHQ 202M	0 .. 2 kV	0 .. 6 mA	< 0.5 mV pp	1 μ A	1 V	< 800 mA	< 100 mA	NIM	HVI202
NHQ 203M	0 .. 3 kV	0 .. 4 mA	< 0.5 mV pp	1 μ A	1 V	< 800 mA	< 100 mA	NIM	HVI203
NHQ 204M	0 .. 4 kV	0 .. 3 mA	< 1 mV pp	1 μ A	1 V	< 800 mA	< 100 mA	NIM	HVI204
NHQ 205M	0 .. 5 kV	0 .. 2 mA	< 2 mV pp	1 μ A	1 V	< 800 mA	< 100 mA	NIM	HVI205
NHQ 206L	0 .. 6 kV	0 .. 1 mA	< 2 mV pp	1 μ A	1 V	< 500 mA	< 100 mA	NIM	HVI206

Function of the KILL switch:

Switch to the right position: (ENABLE KILL)

The output voltage will be shut off permanently without ramp on exceeding V_{max} , I_{max} or in the presence of an INHIBIT signal (Low=active). Restoring the output voltage is possible after operating the switches HV-ON or KILL or reading "LAM status" and then "Start voltage change" by DAC control.

Note: When capacitance is effective at the HV-output or when the rate of change of output voltage is high (hardware ramp) at high load, then the KILL function will be released by the current charging the condenser. In this case use a small rate of output change (software ramp) or select not until output voltage is set voltage.

Switch to the left position: (DISABLE KILL)

The output voltage will be limited to V_{max} , output current to I_{max} respectively; INHIBIT shuts the output voltage off without ramp, the previous voltage setting will be restored with hard- or software ramp on INHIBIT no longer being present.

Operation under RS232 control

The most important parameters of the high voltage supply can be set and read under computer control via the RS232 interface. An optional VI (virtual instrument) is available for easy setting of parameters by simple mouse click.

RS232 control mode

- 1st Write function: set voltage; ramp speed; maximal output current (current trip); auto start
- 2nd Switch function: output voltage = set voltage, output voltage = 0
- 3rd Read function: set voltage; actual output voltage; ramp speed; actual output current; current trip; auto start; hardware limits current and voltage; status

Front panel switches are having priority over software control.


Manual control mode

While the unit is operated in manual control mode, RS232 read cycles are interpreted only. Commands are accepted, but do not result in a change of the output voltage.

Options

NHQ 04 Supply voltage $\pm$ 24V (<900 mA)

CAN-Bus interface instead of RS232C interface

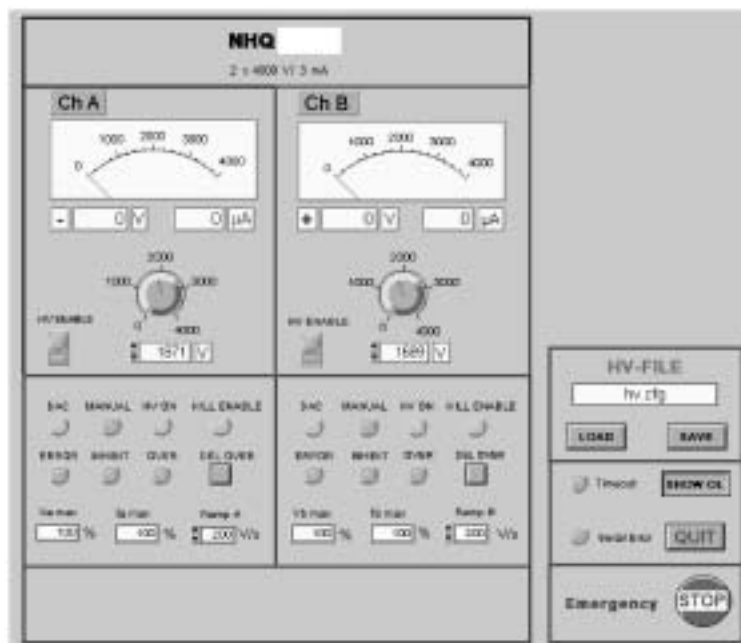

Example of a VI Virtual Instrument (optional, ask factory for details of current version)

NHQ205M

Specifications

Model	NHQ	202M	203M	204M	205M	206L
Output voltage V_0	kV	0 ... 2	0 ... 3	0 ... 4	0 ... 5	0 ... 6
Output current per channel	mA	0 ... 6	0 ... 4	0 ... 3	0 ... 2	0 ... 1
Stability (no load / load)	ΔV_0	$< 5 \times 10^{-5}$				
Stability	$\Delta V_0 / \Delta V_I$	$< 5 \times 10^{-5}$				
Temperature coefficient	/K	$< 5 \times 10^{-5}$				
Ripple	mVp-p typ.	< 2				
	mVp-p max.	5				
LCD Display		4 digits with sign, switch controlled voltage display in [V] current display in [μ A]				
Res. of current measurement		1 μ A				
Res. of voltage measurement		1 V				
Accuracy current measurement		$\pm (0,05\% I_0 + 0,02\% I_{0 \max} + 1 \text{ digit})$ for one year				
Accuracy voltage measurement		$\pm (0,05\% V_0 + 0,02\% V_{0 \max} + 1 \text{ digit})$ for one year				
Voltage control	CONTROL	upper position: 10 - turn potentiometer				
	switch in:	lower position (DAC): control via serial interface				
Rate of change of output voltage	hardware ramp:	500 V/s (on HV-ON/ -OFF)				
	software ramp:	2 ... 255 V/s				
Protection		- separate current and Voltage limit (hardware, rotary switch in 10%-steps) - INHIBIT (ext. signal, TTL-level, Low=active) - programmable current trip (software)				
Power requirements V_{INPUT}	$\pm 24 \text{ V}$	$< 800\text{mA}$	$< 800\text{mA}$	$< 800\text{mA}$	$< 800\text{mA}$	$< 500\text{mA}$
	$\pm 6 \text{ V}$	$< 100\text{mA}$	$< 100\text{mA}$	$< 100\text{mA}$	$< 100\text{mA}$	$< 100\text{mA}$
Case		NIM-Standard module: NIM #1				
Connectors		NIM: 3-pin, Interface: 9-pin female D-Sub connector				
HV Connector		SHV (module rear panel)				
INHIBIT Connector		LEMO (module front panel)				
Operating temperature		0 ... +50 °C				
Storage temperature		-20 ... +60 °C				

NHQ205M



ComTec

GmbH · Grünwalder Weg 28a · D-82041 Oberhaching · Germany
Tel 49-(0)89-66 51 80 50 · FAX 49-(0)89-66 51 80 40 · <http://www.fastcomtec.com>